


**薄壁交联聚烯烃绝缘低压汽车电线 TXL**  
**XLPO Insulation Auto Wire with low tension and thin wall - TXL**

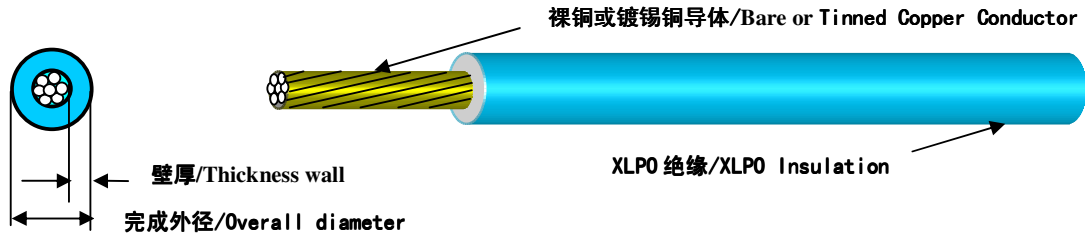

**产品执行标准/Product executive standard:**

SAE J 1128/2005 低压初级电缆/Low Tension Primary Cable

**Description:**

Bare or Tinned stranded copper conductor; 24-8AWG  
 Temperature range: -40~125℃; Rated voltage: 50 volts  
 Thermosetting and good mechanical characters  
 XLPO material of insulation.  
 Easy stripping and cutting.  
 Resistant to acids, alkalis, oils, moisture and fungi.

**说明:**

导体使用裸铜或镀锡铜绞线，24-8AWG  
 温度范围：-40~125℃；额定电压：50V  
 交联聚烯烃绝缘，优良热稳定性和机械性能  
 易开线和剥皮。  
 抗酸碱，耐油及防潮霉性能好。

**Application:**

It's applicable to low tension primary wire of electric system for auto within.

**应用:**

适用于汽车内部电气系统用低压电线

**Specification: 技术参数:**

型号 Type	线规 AWG	导体结构 Conductor size (No./AWG)	导体外径 Conductor Dia.(mm)	绝缘厚度 Insulation thickness (mm)		完成外径 Overall diameter (mm)		包装尺寸 Package size FT/R
				Average	Min.	Min	Max.	
TXL-8	8	168/0.254	3.80	0.55	0.39	4.60	4.90	500
TXL-10	10	105/0.254	3.00	0.50	0.35	3.80	4.00	500
TXL-12	12	65 / 0.254	2.40	0.45	0.32	3.10	3.30	1000
TXL-14	14	41 / 0.254	1.90	0.40	0.28	2.50	2.70	1000
TXL-16	16	26 / 0.254	1.50	0.40	0.28	2.20	2.40	1000
TXL-18	18	16 / 0.254	1.20	0.40	0.28	1.90	2.20	2000
TXL-20	20	7/0.30	0.92	0.40	0.28	1.70	1.90	2000
TXL-22	22	7/0.254	0.79	0.40	0.28	1.50	1.70	2000
TXL-24	24	7/0.20	0.61	0.40	0.28	1.30	1.50	2000

单支导体公差/Conductor tolerance: +/-0.005mm

订货资料/Order reference: :

可选颜色 (SAE 标准色系): 黑, 白, 黄, 绿, 蓝, 棕, 灰, 橙, 紫, 黄绿。

Colors available: black, white, yellow, green, blue, brown, gray, orange, violet, yellow-green

交货日期/Delivery :7 days after accepting purchase orders. 接到订单后 7 天。