深圳市导宇电子有限公司
Shen Zhen worldlink industrial Co.,Ltd

VDE N5YAF PTFE 高温电子线 8196

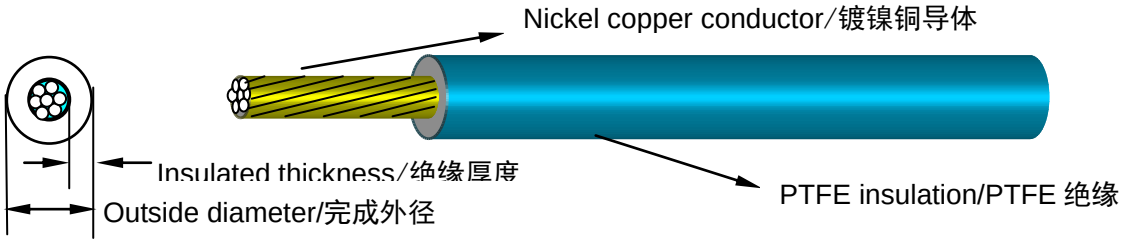

Description:

Nickel stranded copper conductor 0.15~6.0mm^2
Rated temperature: -60~250C,
Rated voltage:300/500 volts
Passed VDE standards.
Insulation of wires to ensure easy
Stripping and cutting.
Resistant to acids, alkalis, oil , moisture and fungi.
Compliance RoHs

Application:

For general purpose wiring of electronic
Lighting and electrical equipment

说明：

导体使用镀镍铜绞线 0.15~6.0mm^2
额定温度：-60~250C
额定电压：300/500V
通过 VDE 认证
绝缘，优良热稳定性和机械耐磨
易开线和剥皮。
抗酸碱，耐油及防潮霉性能好.
符合 RoHs 指令

应用:

一般商用电器及设备仪器出线。

Specification: 技术参数:

规格 (mm2)	导体结构 (NO. /MM)	绝缘厚度 (MM)	标称外径 (MM)	截面积 (MM^2)	导体电阻 欧姆/Km	包装 (英尺/卷)
N5YAF-015	7/0.16	0.30	1.10	0.15	146	2000
	19/0.10	0.30	1.10	0.15	146	2000
N5YAF-025	19/0.127	0.30	1.23	0.25	89.2	2000
N5YAF-035	19/0.15	0.30	1.35	0.35	54.8	2000
	7/0.254	0.30	1.35	0.35	54.8	2000
	1/0.65	0.30	1.25	0.35	54.8	2000
N5YAF-050	19/0.19	0.30	1.55	0.50	34.6	1000
	1/0.81	0.30	1.41	0.50	34.6	1000
N5YAF-075	19/0.225	0.30	1.70	0.75	28.3	1000
N5YAF-100	19/0.254	0.30	1.88	1.00	23.0	1000
N5YAF-125	19/0.29	0.30	2.05	1.25	14.7	1000
N5YAF-150	19/0.32	0.30	2.20	1.50	12.1	1000
N5YAF-200	19/0.37	0.35	2.56	2.00	8.96	1000
N5YAF-250	19/0.40	0.35	2.70	2.50	7.20	1000
N5YAF-400	19/0.52	0.40	3.41	4.00	5.45	1000
N5YAF-600	19/0.63	0.40	3.97	6.00	3.70	1000

tolerance 公差：conductor 导体：+/−0. 005mm　OD 电线外径：+/−0. 10mm